




SIDEKICK 180-520

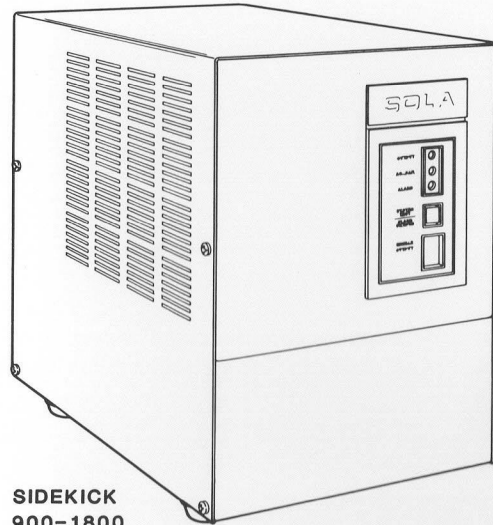


SIDEKICK 900-1800

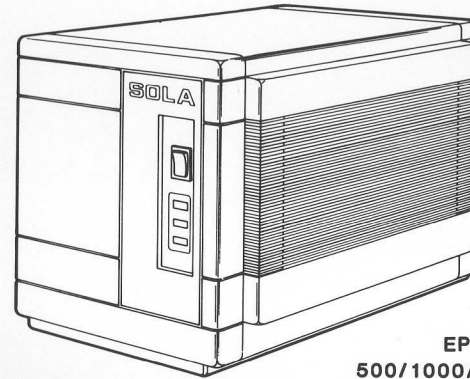


**EPC
500/1000/2000 VA**

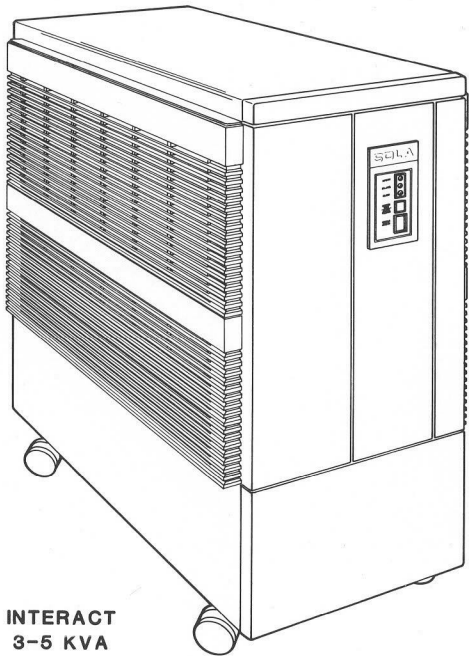


**INTERACT
3-5 KVA**

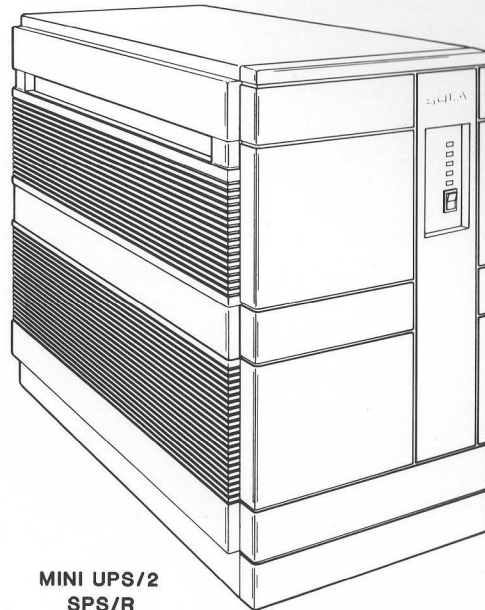

**MINI UPS/2
SPS/R**



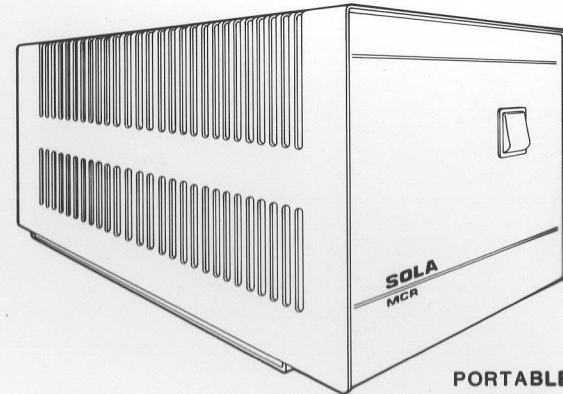


**PORTABLE
MCR/PC**

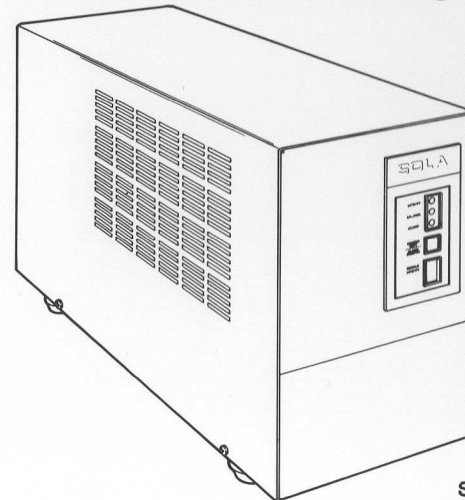

SIDEKICK PLUS

CPD



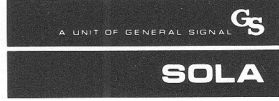
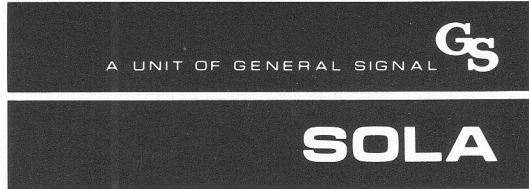
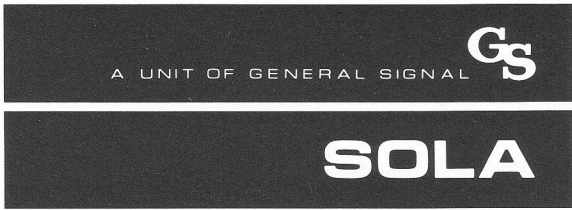


A UNIT OF GENERAL SIGNAL

A UNIT OF GENERAL SIGNAL



When using the signature version of the logo in two colors, the "GS" and "A UNIT OF GENERAL SIGNAL" must always appear in PMS 375 Green and the unit name in Black. In the single color version, the "GS" only is to be a 30% screen of the color — preferably black.

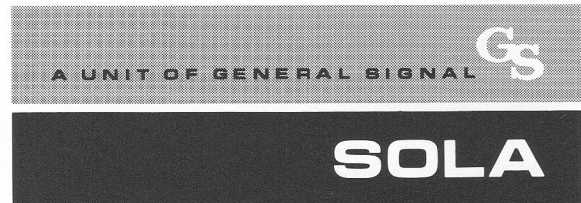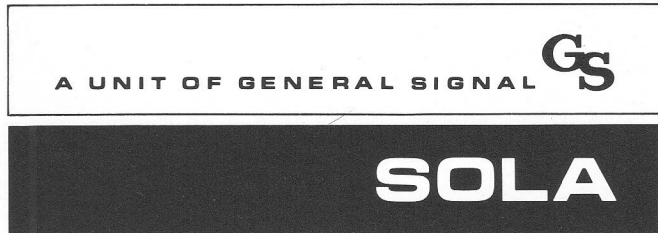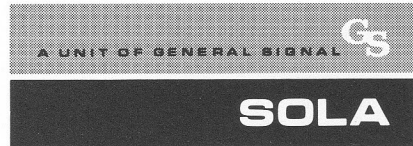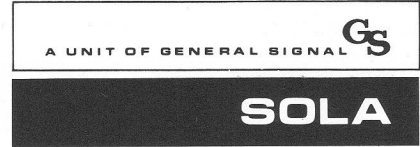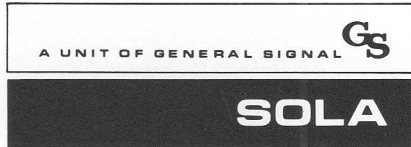

Single color applications of the flag are to have a top bar with a 30% screen of the color and lettering 100% of the same color (with the exception of the "GS" which in all cases is reversed.) The bottom bar is to be 100% of the color with white reverse type. Remove keyline.














CAMERA READY ART FOR REPRODUCTION PURPOSES

FULL COLOR

For full color applications. Top bar is to be PMS 375 Green, bottom bar PMS 300 blue with white reverse type.

TWO COLOR

For two color presentation. The top bar is PMS 375 Green, bottom bar black with white reverse type.

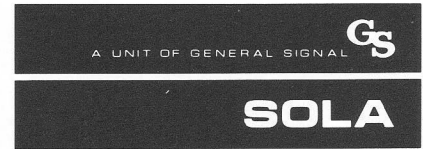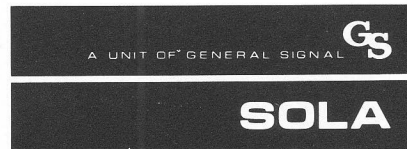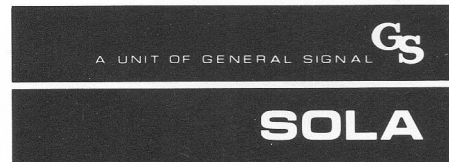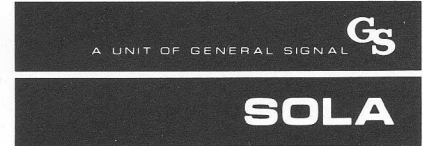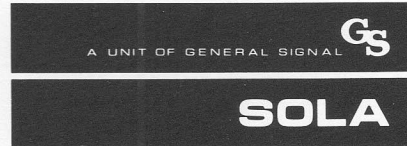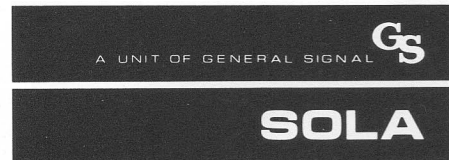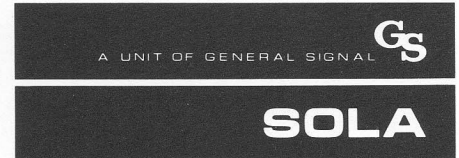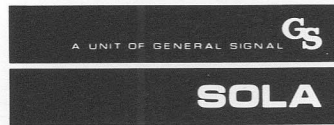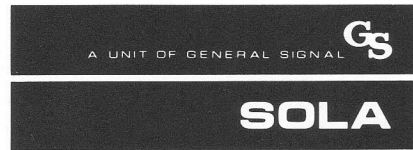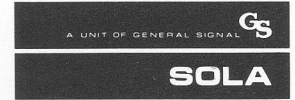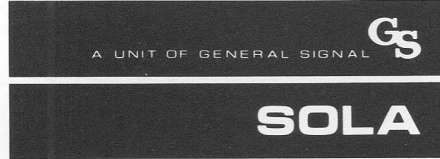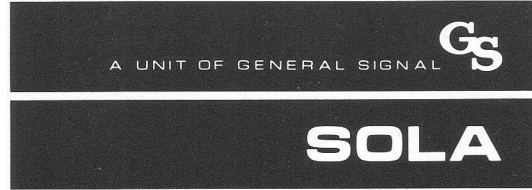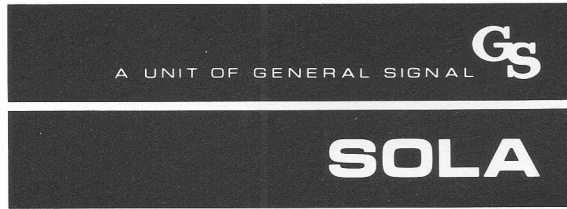

SINGLE COLOR

Single color applications of the flag are to have a top bar with a 30% screen of the color and lettering 100% of the same color (with the exception of the "GS" which in all cases is reversed.) The bottom bar is to be 100% of the color with white reverse type.

