


MINI-286

REDUCED SIZE • LOWER POWER CONSUMPTION • LESS HEAT DISSIPATION • EASIER MAINTENANCE



- 80286-8 DUAL SPEED CPU OPERATING AT 10/8.0 MHz
- HARDWARE SELECTABLE OPERATING SPEED
- ADVANCED VLSI TECHNOLOGY BY CHIPS & TECHNOLOGIES
- CMOS REAL TIME CLOCK/CALENDAR WITH BATTERY BACK-UP ON BOARD
- PHOENIX BIOS - THE STANDARD OF COMPATIBILITY
- 8 EXPANSION SLOTS
 - 6 x 62 AND 36-PIN CARD-EDGE CONNECTOR
 - 2 x 62-PIN CARD-EDGE CONNECTOR
- 640K OR 1MB RAM CAPACITY ON BOARD
- SOCKET FOR OPTIONAL 80287 MATH CO-PROCESSOR
- CONNECTION FOR KEYLOCK AND POWER ON LED
- CONNECTION FOR HARDWARE RESET
- 16-LEVEL INTERRUPT
- 7-CHANNEL DMA
- 3 PROGRAMMABLE TIMERS
- FULLY IBM AT COMPATIBLE
- FITS BOTH AT AND XT COMPUTER CASES

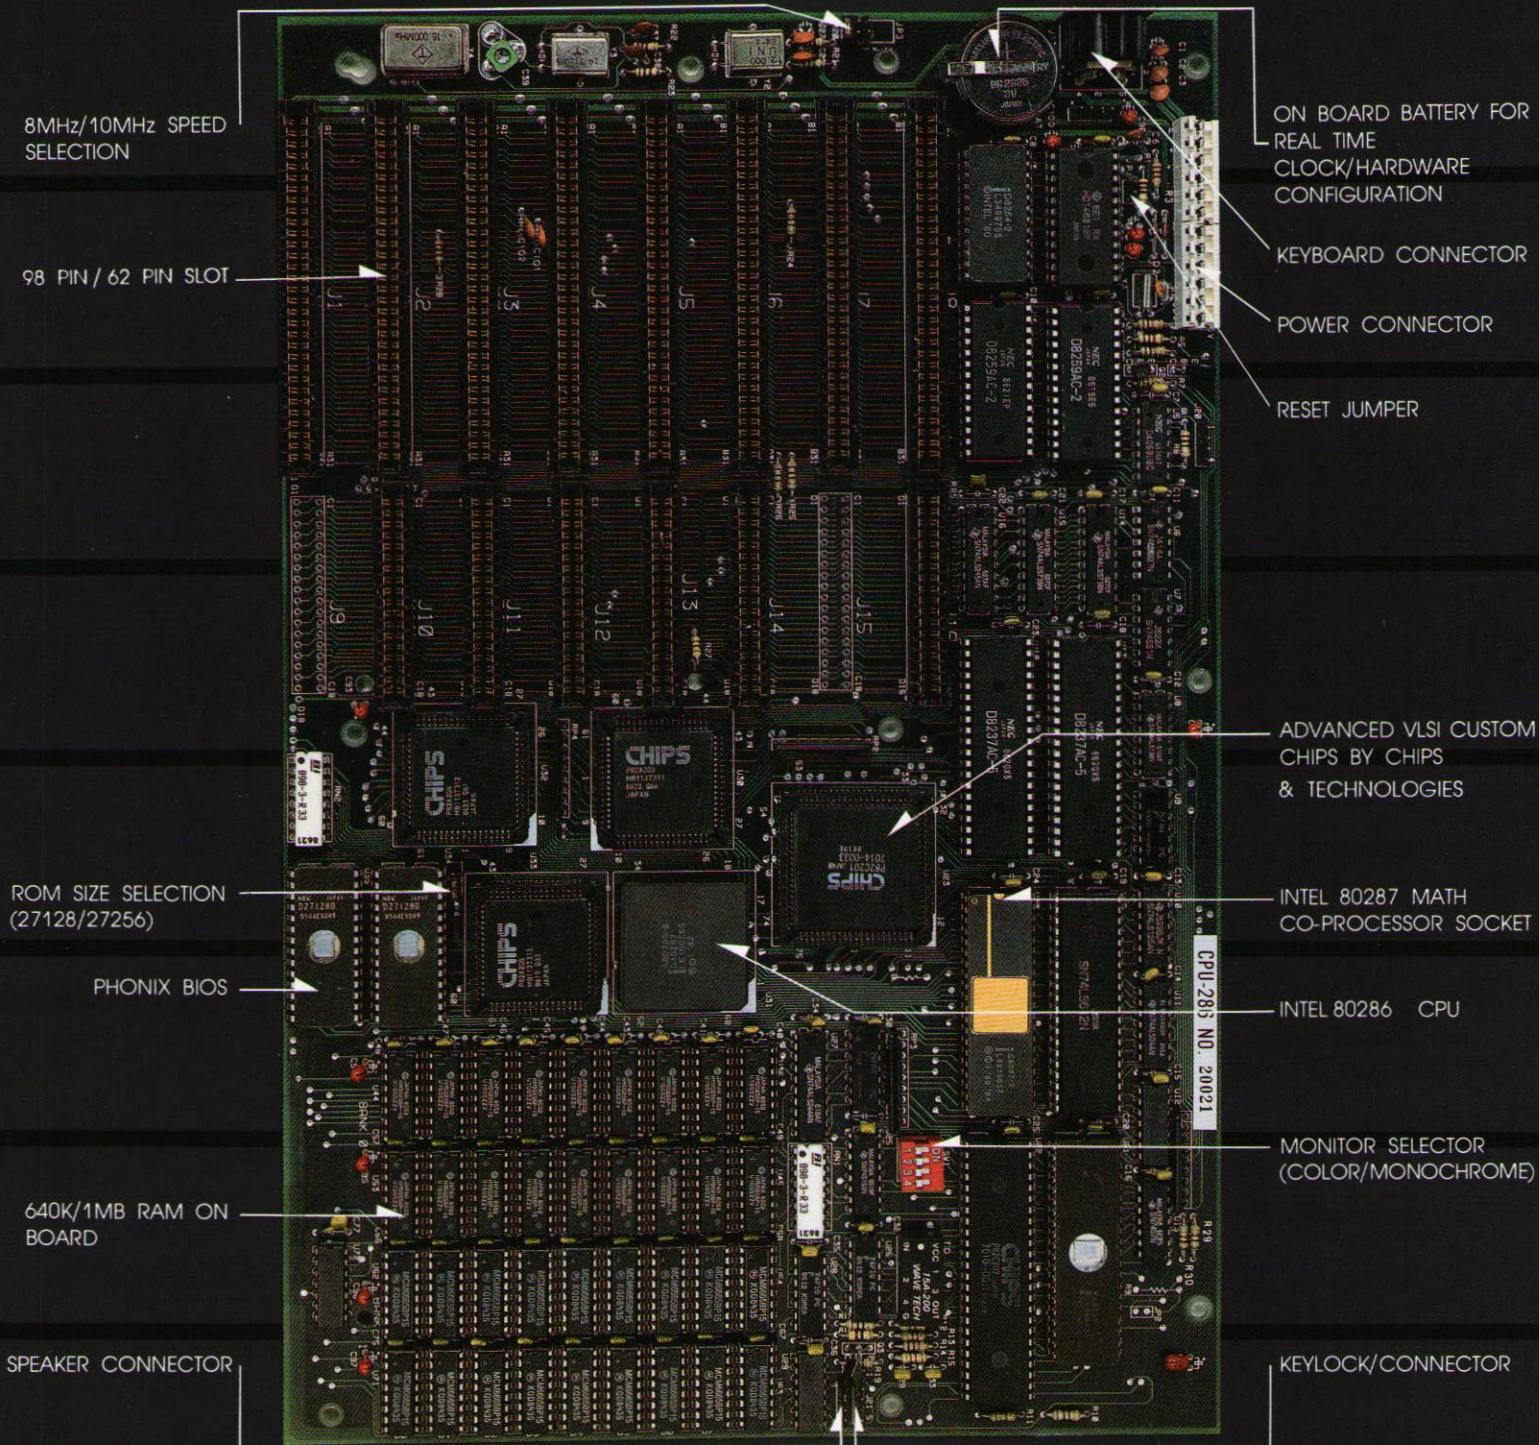


1260 EAST COLORADO BLVD.
PASADENA, CALIFORNIA 91106 (818) 796-8684

IBM is a registered trademark of International Business Machines Corp. • PC/XT is a trademark of IBM • AT is a registered trademark of IBM
• © 1986 Computer Products United

CPU TURBO

THE BEST TURBO BOARD ON THE MARKET

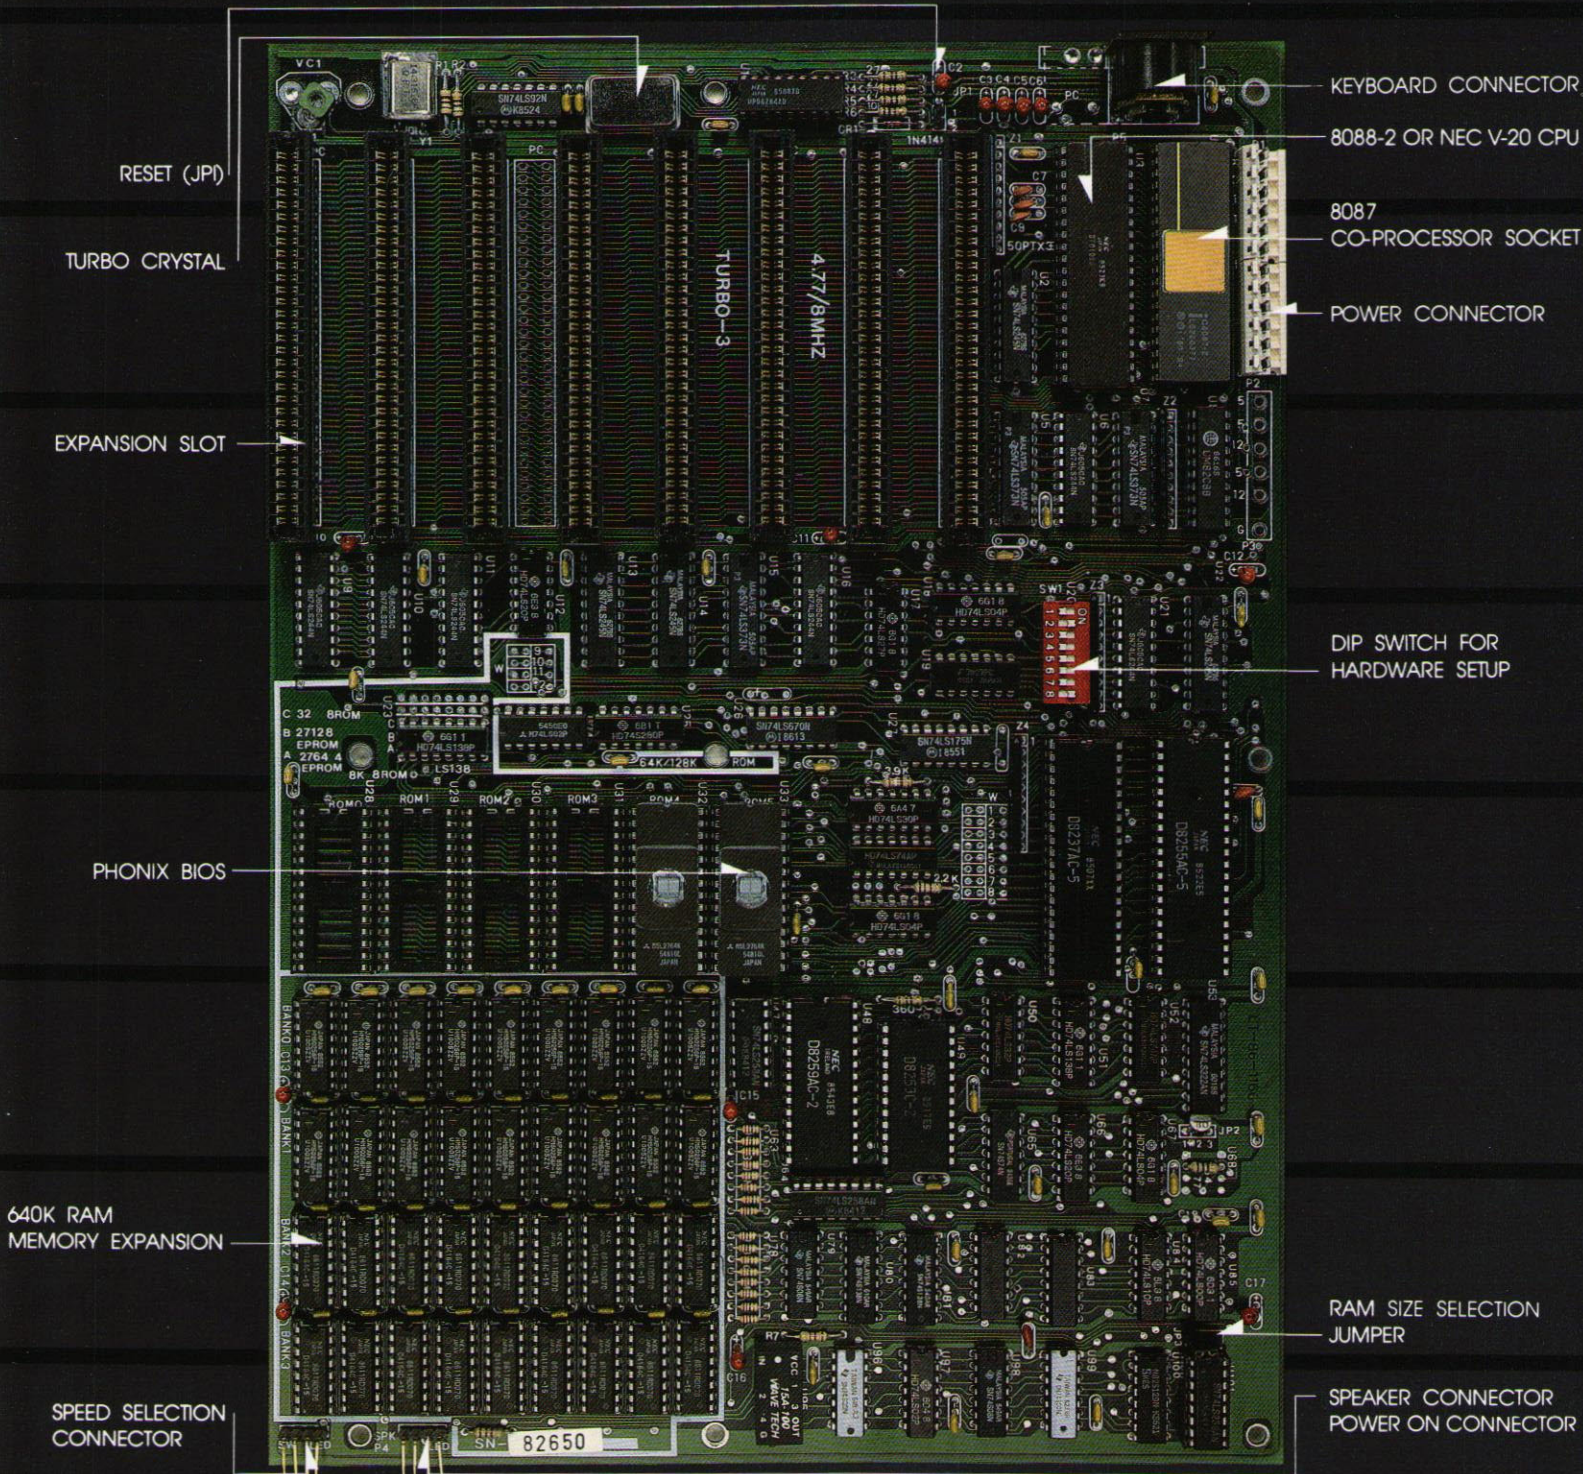

- PHOENIX BIOS - THE STANDARD OF COMPATIBILITY
- NEC V-20 DUAL SPEED CPU OPERATING AT 4.77/8.0 MHZ
- NORTON UTILITY RATING: CPU TURBO 3.1
IBM PC/XT 1.0
- ON BOARD MEMORY EXPANDABLE TO 640K WITH NO-WAIT STATE
- HARDWARE AND SOFTWARE SELECTABLE OPERATING SPEED WITHOUT POWER DOWN
- 8 EXPANSION SLOTS
- SOCKET FOR OPTIONAL 8087-2 MATH CO-PROCESSOR
- COMPATIBLE WITH EGA ADAPTER
- 4 LAYER PCB DESIGN
- CONNECTION FOR TURBO MODE AND POWER ON LED
- CONNECTION FOR HARDWARE RESET
- FULLY COMPATIBLE WITH IBM PC/XT



1260 EAST COLORADO BLVD.
PASADENA, CALIFORNIA 91106 (818) 796-8684

IBM is a registered trademark of International Business Machines Corp • PC/XT is a trademark of IBM • AT is a registered trademark of IBM
© 1986 Computer Products United