

VGA TO NTSC, PAL




United International Development

210 Post Street, Suite #1118
San Francisco, CA 94108

*Tel: 415-392-3717
3714*

Fax: 415-392-6515

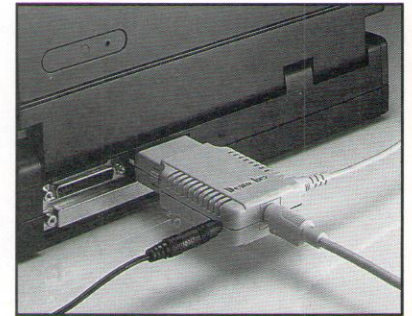

DEMOKEY

FEATURES:

- Pocket Size
- Plug-In Installation
- Demokey Driver Provided
- AV-RCA/S-VHS Output Supported
- LCD/TV Display Toggling
- 11 VGA Display Modes Supported
- TV Auto Blanking
- Display Size & Position Adjustment
- Interlaced/Non-Interlaced Mode Display

WORK WITH SOFTWARE

- WINDOWS
- LOTUS 1-2-3
- ANIMATOR
- PAINT BRUSH
- COLOR RIX
- OR CAD
- OTHERS AS WELL

APPLICATION

- Briefing
- Presentation
- CAI
- Animation
- Graphics Slide Show
- VCR Recording

WORK WITH VGA CHIP:

- PARADI S
- CIRRUS
- IBM
- OAK
- ATI
- VIDEO 7
- TSENG LAB

SPECIFICATION:

DIMENSION: 5.0(W)*9.0(L)*2.2(H) UNIT:cm

WEIGHT: 100 UNIT:gw

INPUT: VGA DB-15 CONNECTOR WITH SIGNALS
RED GREEN & BLUE COLORS SIGNALS
HORIZONTAL & VERTICAL SYNC. SIGNALS.

OUTPUT: NTSC/PAL Y/C SEPERATED SIGNALS WITH S-VHS CONNECTOR.
NTSC/PAL COMPOSITE SIGNAL WITH AV CONNECTOR.

EXTERNAL POWER ADAPTER:

OUTPUT: +9 DC VOLTS. 0.5 A

INPUT: 110/220 AC VOLTS

VGA MODE

RESOLUTION	*MODE NO	TYPE	COLORS
40* 25	0,1	TEXT	16
80* 25	2,3	TEXT	16
320*200	4,5	GRAPHICS	4
640*200	6	GRAPHICS	2
320*200	D	GRAPHICS	16
640*200	E	GRAPHICS	16
640*350	10	GRAPHICS	16
640*480	11	GRAPHICS	2
640*480	12	GRAPHICS	16